



2560 Print System

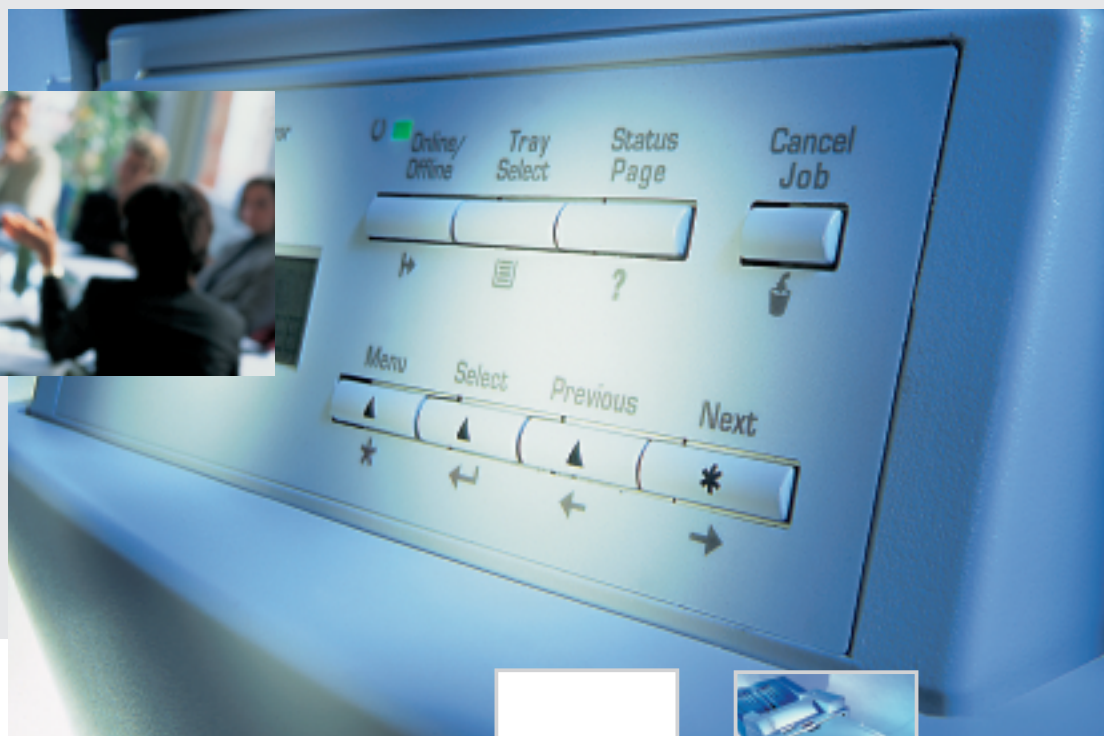

Versatile network monochrome laser printer
Up to 25 ppm
Copy, duplex, staple, mailbox, and hole punch options
Up to 1200 x 1200 dpi

MINOLTA
QMS

The essentials of imaging

www.minolta-qms.com

Designed to grow with your business



A breakthrough in printing

The **2560 Print System** represents a breakthrough in workgroup printing, designed to meet the ever-expanding demands of the business user.

The **2560 Print System** can be enhanced with a wide variety of options giving unrivaled print **flexibility** and **document finishing** to suit the multitude of print requirements within the modern workplace.

Versatile document handling and finishing features include:

- Duplexer for two-sided printing
- 2,500-sheet Large Capacity Tray
- 5-bin Mailbox
- 10-bin Mailbox
- Stack/staple/hole punch Finisher
- Stack/staple/hole punch Mailbox Finisher
- SC-110 digital copier/scanner



2560 BX/FX/EX



Performance printers

- The **2560 Print System** is available in three models —the 2560 BX, 2560 FX, and 2560 EX. In addition to being flexible, each **2560** is a high-performance printer, generating prints at up to 25 pages per minute.
- With standard Ethernet® connectivity the **2560** can be shared by large and small workgroups alike.
- Each **2560 Print System** offers superior 1200 x 1200 dpi print quality and advanced halftone settings for producing razor sharp, high-definition documents.

Management made easy

- Managing a single **2560** or an entire network of printers is easy with the advanced suite of printer management software provided.
- The latest printer drivers, along with **PageScope** remote management software and **CrownView™** Web-based printer management, are available for simplified printer operation.

As demands grow ...

- As your printing requirements become more challenging as time goes on, the **2560** can adapt with your business.
- The **2560** has a maximum paper input of 3,750 sheets, supports a variety of document handling options, and can be equipped with up to 192 MB RAM for high-level printing tasks.

Fast and versatile

- | | |
|--|---|
| • up to 25 ppm | • user-defined custom media sizes |
| • standard 10/100BaseTX Ethernet Interface | • 750 sheets standard paper input |
| • 1200 x 1200 dpi resolution | • stacking, mailbox, hole punching, stapling, copying, and duplexing capabilities |
| • PostScript®, PCL® 5e, and PCL 6 compatible | • high-capacity toner cartridge |
| • paper sizes from postcard to ledger/A3 | |



MINOLTA
QMS



2560 Print System – Technical

Printing Process

Print Method: electrophotographic laser

Print Speed (simplex):

Letter/A4: 25 ppm

Ledger/A3: 14 ppm

Print Speed (duplex):

Letter/A4: 17 ppm

Ledger/A3: 8 ppm

Recommended Duty Cycle: up to 75,000 prints per month

Hardware and Software Capabilities

Processor: IBM® PowerPC 403GCX processor, 80 MHz

Memory: (see table below) Upgradeable to 192 MB RAM via 3 SIMM slots

Internal IDE Hard Disk: for fonts and forms storage and enhanced collation (std. on EX model)

Printer Emulations: PostScript Level 2, PCL 5e, PCL 6

Interface Support

Automatic Interface Switching

Standard Interfaces: Ethernet (10/100BaseTX): supports NetWare® IPX/SPX; TCP/IP; EtherTalk®; Windows® 3.1x, 95, 98, NT; SNMP; HTML; DHCP/WINS
Bidirectional IEEE 1284 parallel: supports Microsoft® 'Plug and Play'
RS-232 serial

Paper Handling

Paper Sizes Supported:

Universal Cassettes: Letter, legal, ledger, 8" x 10.5", A4, A3, B4

Multipurpose Cassette: Letter, legal, ledger, 8" x 10.5", executive, statement, folio, A4, A3, A5, A6, B4, B5, custom; Com 10, DL, C5, Monarch envelopes
Large Capacity Input Tray (optional): Letter, A4, B5

Paper Input:

Standard: 500-sheet Universal cassette, 250-sheet multipurpose cassette

Optional: 2,500-sheet Large Capacity Tray (LCT), up to three additional 500-sheet Universal cassettes

Paper Output:

Standard: 500-sheet face-down output tray

Optional: 5-bin Mailbox, Finisher with stacker/stapler/hole punch, Mailbox Finisher with stacker/stapler/hole punch

Duplexer: for two-sided printing (optional)

Copying: SC-110 digital color copier/scanner (optional)

Printable Area: Guaranteed 4 mm from all edges. Edge-to-edge printing available on all page sizes.

Paper Weights: Plain paper: 17 - 28 lb. Bond (60 - 90 g/m²)

Thick stock: up to 90 lb. Index (157 g/m²)

Print Media: Plain paper, transparencies, laser-quality labels, thick stock; Com 10, DL, C5, Monarch envelopes

Physical

Type: Laser printer with internal controller

Dimensions (W x D x H):

Printer only: 21.1" x 21.4" x 16.9" (535 x 543 x 428 mm)

Printer with LCT: 23.2" x 21.4" x 31.8" (632 x 658 x 1,133 mm)

5-bin Mailbox: 18.9" x 21.4" x 14" (480 x 658 x 355 mm)

10-bin Mailbox: 18.9" x 20.1" x 34" (480 x 570 x 863 mm)

Weight:

Printer: 66 lbs. (30 kg)

5-bin Mailbox: 26.8 lbs. (12.2 kg)

10-bin Mailbox: 65 lbs. (29.5 kg)

Electrical

Power Requirements:

100V Model: 90-106 VAC, 50/60 Hz

110V Model: 108-134 VAC, 50/60 Hz

220V Model: 198-256 VAC, 50 Hz

Power Consumption: maximum 750 W

Energy Star® Compliant: maximum 45 W

Environmental

Temperature Requirements: Operating: 41° - 95° (5° - 35° C)

Non-Operating: 32° - 95° (0° - 35° C)

Humidity: Operating: 15 - 85% RH, non-condensing

Non-Operating: 10 - 85% RH, non-condensing

Noise Level: Operating: < 55 dBA; Standby: < 38 dBA

Regulatory/Safety Conformity

UL, cUL, EU, FCC-A, DOC-A, VCCI, CE Marking, C-Tick, ACA, CDRH

Consumables*

Monocomponent dry toner cartridge

Toner yield: up to 15,000 pages @ 5% coverage

Typefaces

136 resident PostScript fonts

80 scalable PCL 5e/6 fonts

TrueType® font support in PostScript and PCL

Warranty Period and Conditions

1 year on-site (not available in all areas)

1. The stated life expectancy of each consumable in your printer is based on printing under specific operating conditions such as page coverage for a particular page size (5% coverage of letter/A4). The actual consumables life will vary depending on the use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity.



www.q-shop.com
for when you need them

Model Specific Features

Features/Model	2560 BX	2560 FX	2560 EX
Print Speed (ppm - simplex)	up to 25 letter/A4, 14 ledger/A3	up to 25 letter/A4, 14 ledger/A3	up to 25 letter/A4, 14 ledger/A3
Print Speed (ppm - duplex)	up to 17 letter/A4, 8 ledger/A3	up to 17 letter/A4, 8 ledger/A3	up to 17 letter/A4, 8 ledger/A3
Resolution (all paper sizes)	600 x 600 dpi	1200 x 1200 dpi	1200 x 1200 dpi
Resolution (letter/A4)	1200 x 1200 dpi	1200 x 1200 dpi	1200 x 1200 dpi
Memory (max. 192 MB)	8 MB RAM	32 MB RAM	32 MB RAM
IDE Hard Drive	○	○	●
500-sheet Universal Cassette	●	●	●
250-sheet Multipurpose Cassette	●	●	●
2500-sheet Large Capacity Tray	○	○	○
Extra 500-sheet Universal Cassettes	○	○	○
5-bin Mailbox	○	○	○
10-bin Mailbox	○	○	○
Stack/Staple/Hole Punch Finisher	○	○	○
Stack/Staple/Hole Punch Mailbox Finisher	○	○	○
Duplexer	○	○	○
SC-110	○	○	○
Automatic Document Feeder	○	○	○
○ Optional ● Standard			

MINOLTA-QMS Corporate Office
MINOLTA-QMS, Inc.
(USA, Canada, Latin America)
Tel.: +1 (334) 633 4300
Fax: +1 (334) 639 4490

MINOLTA-QMS Asia
Tel.: (+61) 2 - 9884 9966
Fax: (+61) 2 - 9885 9977

MINOLTA-QMS Australia
Tel.: (+61) 2 - 9884 9966
Fax: (+61) 2 - 9884 9977

MINOLTA-QMS Benelux
(The Netherlands, Belgium, Luxemburg)
Tel.: (+31) 346 - 551 333
Fax: (+31) 346 - 550 170

MINOLTA-QMS Denmark
Tel.: (+45) 72 - 21 21 21
Fax: (+45) 72 - 21 21 22

MINOLTA-QMS France
Tel.: (+33) 01-41-07-93-93
Fax: (+33) 01-40-83-01-10

MINOLTA-QMS GmbH
(Germany, Austria, Switzerland)
Tel.: (+49) 89/63 02 67-0
Fax: (+49) 89/63 02 67-67

MINOLTA-QMS Iberica
(Spain, Portugal)
Tel.: (+34) 916 220036
Fax: (+34) 916 220037

MINOLTA-QMS Italy
Tel.: (+39) 0 02 - 39 011 1
Fax: (+39) 0 02 - 39 011 219

MINOLTA-QMS Japan
Tel.: (+81) 3 5439 2700
Fax: (+81) 3 5439 2710

MINOLTA-QMS Sweden
Tel.: (+46) 8 - 627 7500
Fax: (+46) 8 - 627 7607

MINOLTA-QMS South Africa
Tel.: (+27) 011 - 249 4000
Fax: (+27) 011 - 249 4039

MINOLTA-QMS UK
(UK, Ireland)
Tel.: (+44) 1784 - 442255
Fax: (+44) 1784 - 461641

For all other countries:
MINOLTA-QMS Europe, Middle East, Africa
Tel.: (+31) 346 551 333
Fax: (+31) 346 550 170

Websites:
www.minolta-qms.com
www.q-shop.com

MINOLTA
QMS

©2001 MINOLTA-QMS, Inc. All rights reserved. Specifications are subject to change without notice. The MINOLTA-QMS logo, and CrownView are trademarks or registered trademarks of MINOLTA-QMS, Inc. All other trademarks or registered trademarks are the property of their respective owners. 05/001

* The addition of some options, in some combinations may cause the product to become non-compliant. Energy Star compliance does not represent an EPA endorsement of any product or service.

PN: 2560Ss5_01